

AZECA™

Ditch the Wire!™

Retractable Bluetooth® Headset with Vibration



Owner's Manual



Model AZM02

Thank you for choosing the Azeca Retractable headset model AZM02. Please read this user's manual carefully before use.

Features

- Earbud retracts keeping your ear free!
- Securely clips to clothing.
- Vibrates when a call is received
- Talk hands-free with built-in mic
- Answer, redial, or make voice calls
- Automatic and multi-point Bluetooth pairing
- USB rechargeable – charges in about 1.5 hours
- Talk – 7 hours, Standby – 240 hours
- Bluetooth profiles(V2.1+EDR): HSP, HFP

Includes

- Headset
- USB charging cable
- Lanyard
- Extra ear cushions
- Pocket case
- English/Spanish manual
- Warranty card

Note:


Even though the paired device and the headset support the same *Bluetooth* profiles, functions may vary due to specification differences of the paired devices.

*** Disclaimer**

To pair a device to this headset the device must support the listed *Bluetooth* profiles. Some features may not be supported by all devices. Contact the device manufacturer regarding feature compatibility.

Retractable

Overview

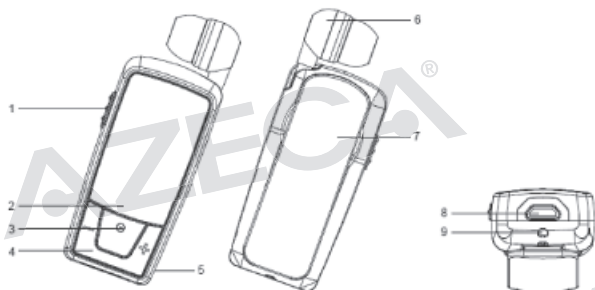

1	Retract button
2	Status indicator
3	Multi-function button (MFB)
4	Volume button (+ and -)
5	Microphone
6	Earbud / Speaker
7	Clip
8	Micro USB charging socket
9	Lanyard hole

Wearing the Headset:

Position with microphone side up



Attach the included lanyard to wear the headset around your neck.

Using the headset

1. Charging the headset

The headset comes with a built-in rechargeable battery. Prior to first time use it is recommendable to fully charge the battery.

When the headset battery power level is low, the LED indicator flashes red every 5 seconds. In addition you will hear a short beep every 20 seconds through the earbud speaker.

2. Using a USB cable

Connect the USB cable to a computer USB port and the USB cable plug to the charging jack of the headset. A Red LED will remain on while the headset is charging. Average charging time is 1.5 hours. When charging is complete the red LED will turn off.

3. Using a USB travel charger (not included)

Plug in USB travel charger to a standard power outlet. Connect the USB cable to the USB plug on the travel charger and then connect the charger plug to the charging jack of the headset as indicated above.

Turning on/off the headset

FUNCTION	OPERATION	LED INDICATOR
Turn On	Press and hold MFB button for 3 to 5 seconds until blue LED flashes	Blue LED flashes 2x every 4 second
Turn Off	Press and hold MFB button for 3~5 seconds until red LED flashes	Red LED flashes 3x

Note:

- In order to save power the headset will turn off automatically if no device is paired within 5 minutes.

4. PAIRING THE HEADSET:

How to enter pairing mode:

FUNCTION	OPERATION	LED INDICATOR	INDICATION TONE
Entering pairing mode	Ensure the headset is turned off, and then press and hold MFB button for 5 to 7 seconds until LED flashes red and blue alternately	LED flashes red and blue alternately	Short "du-da" tone

Note:

- If the headset is not paired with another Bluetooth device after 90 seconds, the headset will return to standby mode automatically in order to conserve power.

5. Pairing the headset with a Bluetooth cell phone

Pairing procedures are subject to different models of cell phones. Please refer to your cell phone user's manual for further information. The general pairing procedure is as follows:

- 1) Place the headset and Bluetooth cell phone where they are easily viewable - no more than 1 meter apart;
- 2) Enter the headset's pairing mode (please refer to "How to enter pairing mode")
- 3) Activate your cell phone's Bluetooth function and set your cell phone to search for Bluetooth devices. After the search is completed, select "AZM02" from the Bluetooth device list;
- 4) If requested enter password or PIN No: "0000" and press "Yes" or "confirm";
- 5) After successful pairing, select "AZM02" in the Bluetooth device list and press "connect".
- 6) After successfully connecting the blue LED flashes once. While connected the blue LED will continue to flash once every 10 seconds.

Note:

- If pairing fails, turn off the headset and repeat the pairing process steps 1 through 6 mentioned above.
- After initial pairing, the headset will automatically pair with the last paired Bluetooth device.
- To pair the headset with other devices, repeats steps 1 through 6 mentioned above.
- If the Bluetooth version of your cell phone is V2.1 and above, you will not need to enter a pairing password as the headset and phone will match automatically.

6. Multi-Point pairing

The headset can connect with two phones simultaneously. To multi-pair please refer to the following steps:

- 1) Firstly, pair the headset with the first Bluetooth phone as described in the "Pairing the headset with a Bluetooth cell phone" section.
- 2) Once the first phone is paired, turn off the Bluetooth headset.
- 3) Put the second Bluetooth phone into pairing mode.
- 4) Turn on the headset and go straight into pairing mode.
- 5) Pair the second Bluetooth phone with the headset.
- 6) The first phone should pair automatically. On certain Bluetooth phones you may need to press "connect" where the AZM02 device is listed in order to complete pairing of the second phone.

Note:

- Voice dialing will only work for the first connected phone.

7. Automatic pairing

Every time the headset is turned on it will pair to last paired device automatically.

Note:

- Before connecting to a Bluetooth device, please turn on the Bluetooth device's Bluetooth function.
- On some Bluetooth cell phones you have to "allow" automatic pairing in the cell phone's settings. Please refer to your cell phone's manual for further information.

Out of Range Alert:

When the headset is out of range of the phone[®], the headset will intermittently vibrate twice. Also two short beeps will be heard through the earbud speaker.

8. Operating the Headset

When a call is received your phone will ring and, simultaneously, the headset will vibrate. At that time press the center Multi-Function button on the headset once. The call is now answered. Pull out the headset earbud from the headset, insert into ear, and start speaking.

You may answer the call first and then pull out headset, pull out the headset first, or do both simultaneously. It may take a few calls to determine which method works best for you.

Be sure to clip the headset in such a way that the microphone side is facing up. The microphone is a small 1 mm hole at the base of the unit.

When your call is finished, press the retract button to retract the earbud back into the unit.

See the chart below regarding all available functions and corresponding indicators.

FUNCTION	MFB (Multi – Function Button)	Audio/ Vibration (Headset)	Phone Speaker	Status Indicator
Incoming Call	---	Ringtone / One vibration every 3 seconds	Ringtone	Blue light flashes with each vibration
Answer a Call	Press once to accept	'Di Do' tone once	No sound	Blue light flashes 1 time every 4 seconds
Answer a Second Call	1. Press once to terminate the first call 2. Press once to shift to second call	'Do Do' tone twice in 3 seconds interval /No vibration	No sound	Blue light keep flashing rapidly
Call Reject	Press twice	'Di Do' tone once / No vibration	No sound	Blue light flash once
Voice Dialing	Press once	A short beep / No vibration	No sound	Blue light flash once
Last Number Redial	Press twice	'Di Do' tone once / No vibration	No sound	No light
Reset / Remove the pairing history	Press and hold the MFB and Volume +	Two short beeps / No vibration	No sound	Red light flashes once

FUNCTION	MFB (Multi – Function Button)	Audio/ Vibration (Headset)	Phone Speaker	Status Indicator
Call Transfer (from headset to mobile phone / or vice versa)	During a conversation, press twice	A short beep once (both from headset to mobile phone / or vice versa) / No Vibration	No sound	Blue light keeps flashing when a call is transferred from headset
Standby mode without mobile connection	-----	A beep once / No vibration	No sound	Blue light flashing 2 times for every 3 seconds
Standby mode with mobile connection	-----	No sound / No vibration	No sound	Blue light flashing 1 time for every 10 seconds

Note:

- 1) Not all cell phones support all functions listed above. Please refer to your cell phone's user's manual for additional information.
- 2) When the volume is adjusted to max. or min. on the headset, you will hear a "du" tone at min. and a "di" tone at max.
- 3) When pressing the answer button on some cell phones, the call will be transferred to the cell phone. You will then have to switch the call to the headset manually. Please refer to your cell phone's user's manual for additional information.
- 4) When using voice dialing, say the voice tag name after hearing a short beep.

Care and maintenance

- Do not expose the headset to liquid, moisture or humidity.
- Do not use abrasive cleaning solvents to clean the headset.
- Do not expose the headset to extremely high or low temperatures.
- Do not dispose of the headset in a fire.
- Do not drop or exert excessive force on the headset as you may damage the internal circuit.
- Do not attempt to disassemble the headset as it will void the warranty.

Troubleshooting

My headset will not turn on

- The battery is low and needs to be recharged.

The red LED is not on when charging?

- Make sure the charging cable is properly connected to the headset.
- If the headset is not used for an extended period of time, you may have to charge the battery for 30 minutes prior to seeing the red LED appear.

The sound is cutting out

- The average operating distance for this Class II device is 33 feet (10 meters). Interior walls, wireless routers, and cordless phones can reduce this operating distance.

I cannot pair the headset with a device.

- This headset will only work with devices that support the following Bluetooth profiles: HFP, HSP
- Be sure to select "AZM02" from the list of found devices. Some phones require you to scroll through a list of previously paired devices.
- Confirm that you are both "paired" and "connected".

I still cannot get my speaker to work

- Call our Help Desk at 1(888) 992-4639

Specifications

Bluetooth specification	Bluetooth V2.1+EDR
Bluetooth profiles	HSP, HFP
Operating distance	10 meters, class II
Working time	Talk: up to 7 hours Standby: up to 240 hour
Battery	Rechargeable Li-Polymer
Charging input voltage	DC +5.0±0.25VA
Charging time	Approx. 2 hours
Dimensions	56.5(L) x 26(W) x 16(H) mm
Weight	23g

FCC Part 15

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



FCC Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada ICES-003 statement

This Class B digital apparatus complies with Canadian ICES-003.

European Union Directives Conformance Statement

Azeca Corp declares that this product is in compliance with:

- The key requirements and relevant provisions of Directive 1999/5/EC
- All other key EU Directives

LIMITED WARRANTY

Azeca Corp ("Azeca") warrants that (a) its Retractable Bluetooth Headset (Model AZM02) will perform substantially in accordance with the accompanying written materials for a period of 6 months from the date of receipt and (b) that Model AZM02 (product) will be free from defects in materials and workmanship under normal use and service for a period of 6 months. In the event applicable law imposes any implied warranties, the implied warranty period is limited to (180) days from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply. Azeca Corp and its suppliers' entire liability and Customer's exclusive remedy shall be, at Azeca Corp's option, either (a) repair, or (b) replacement of the product that does not meet this Limited Warranty and which is returned to the Azeca Corp[®] with a copy of Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, disassembly, or misapplication. Any replacement product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer. This warranty is valid only to the original purchaser of the product in the United States.

TO OBTAIN TECHNICAL SUPPORT OR RETURN INFORMATION

Contact our support team at 1(888) 992-4639

Or email us at help@Azeca.com

TO OBTAIN WARRANTY SERVICE

If you purchased the product from a retailer or web retailer and you are returning the product within their return policy period, return the product with original receipt to the retailer or web retailer.

If you are outside the retailers return policy, contact the Azeca support center to receive a Return Authorization number and return address. Returned packages will not be accepted without a Return Authorization number.

THIS WARRANTY DOES NOT COVER:

Normal wear and tear, damage from accidents, negligence, misuse, abuse, acts of God, commercial use, modifications, attempts to repair, connection to an incorrect voltage supply, or cosmetic damage. This warranty also does not cover product sold refurbished or with all faults.

WARRANTY LIMITATIONS

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AZECA CORP AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPECIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL AZECA CORP OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF AZECA CORP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, AZECA CORP AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Contact Azeca Corp:

For customer service please call: 1-800-934-9839

www.Azeca.com

Distributed by:

Azeca Corp, 11330 Lakefield Dr., Bldg 2, Ste 200, Johns Creek, GA 30097 USA

Copyright © Azeca Corp. All rights reserved. Made in China

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Azeca Corp is under license. Other trademarks and trade names are those of their respective owners.

Other Products by Azeca

Stereo Bluetooth Speaker

Play music from your Smartphone or MP3 player



- Answer, redial or mute calls
- Built-in mic for hands-free communication
- Easy-to-reach controls for volume, next/previous track and pause
- Automatically pairs with last Bluetooth device
- Use battery or AC power
- 30 foot range

Stereo Bluetooth Folding Headset

Play music from your Smartphone or MP3 player



- Answer, redial, mute, or make voice calls
- Extra lightweight – just 1.4 ounces
- Ear fitting, comfortable design
- Easy-to-reach controls
- Folds easily into portable travel case

Stereo Bluetooth In-Car FM Transmitter

Play Smartphone or MP3 music through your car stereo



- Answer Smartphone calls, redial or mute
- Built-in mic for hands-free communication
- Integral USB jack charges other devices
- Auto-scan finds best FM frequency
- Auto-pairs with last Bluetooth device

Stereo Bluetooth Transmitter

Add Stereo Bluetooth to any device with a headphone jack



- Great for MP3 players, and computers
- USB Rechargeable with 10 hour play time
- Includes Velcro for attaching to various devices
- Charge and listen simultaneously

Visit www.Azeca.com for more information or call customer service at 1(800) 934-9839